


110 & 180 DEGREE AIR RELEASE VALVES



110 Degree Air Release Valve
15mm connection

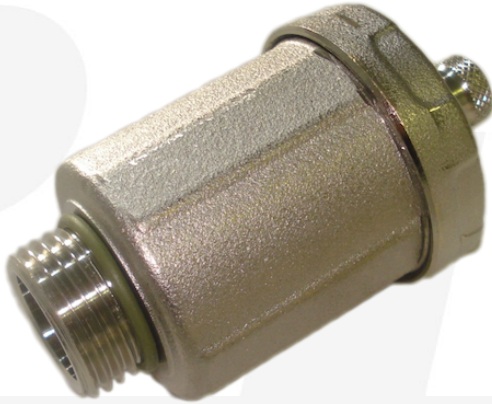


180 Degree Air Release Valve
15mm connection

TECHNICAL SPECIFICATIONS

TECHNICAL FEATURES

Maximum working temperature:	110°C
Maximum working pressure:	10 bar
Maximum venting pressure:	4 bar
Threads:	male UNI ISO 228
Medium:	water and glycol solution
Maximum percentage of glycol:	30%

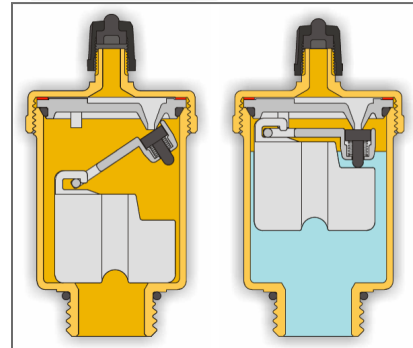

DESCRIPTION OF MATERIAL USED

DESCRIPTION	MATERIAL	TREATMENT
Body	CW617N-EN 12165 brass	"Yellow" or nickel plated
Cover	CW617N-EN 12165 brass	"Yellow" or nickel plated
O-Rings	Ethylene-Propylene Rubber EPDM	-
Float	Polypropilene (PP)	-
Other internal	Acetalic resin (POM)	-
Parts		-
Shutter	Ethylene-Propylene Rubber EPDM	-
Spring	Stainless steel AISI 304	-
Plug	Nylon + EPDM	-

South Africa's leading **solar water heating & heat pump** supplier

Tel: 021 854 5290 | Fax: 086 505 0707 | Email: info@its solar.co.za | Web: www.its solar.co.za