

THERMOSTATIC MIXING VALVE



ITS Thermostatic Mixing Valve is an automatic thermostatic 3-way mixing valve designed to control domestic hot water temperature.


The desired water temperature within the range 38 –65°C is selected with the knob. ITS Thermostatic Mixing Valves are delivered with compression fittings. When mounted against external threads an adapter is to be used.

ITS Thermostatic Mixing valves are delivered with a return-flow preventer to avoid self-circulation. The valves can be mounted in any position.

SPECIFICATIONS

TECHNICAL DATA



Max. Operating pressure:	1,0 MPA (10 bar)
Max. Operating temperature:	90°C (194°F)
Adjustable temperature range:	38 – 65°C (100 – 149°F)
Pressure drop:	See diagram
Valve body corrosion-resistant:	DZR-brass
Type approval:	SITAC 3402/83

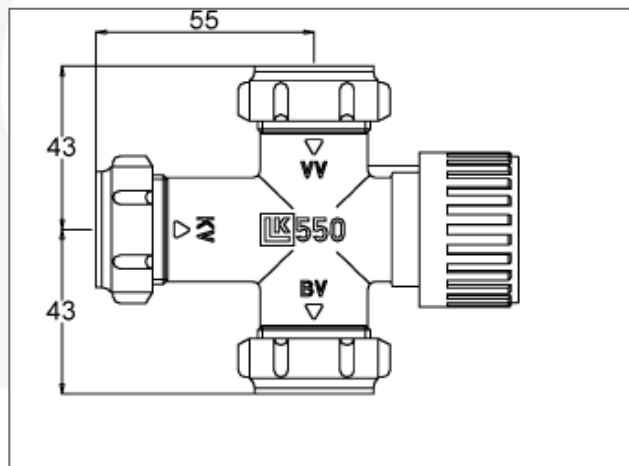

South Africa's leading **solar water heating & heat pump** supplier

Tel: 021 854 5290 | Fax: 086 505 0707 | Email: info@itssolar.co.za | Web: www.itssolar.co.za

PRESSURE DROP & INSTALLATION

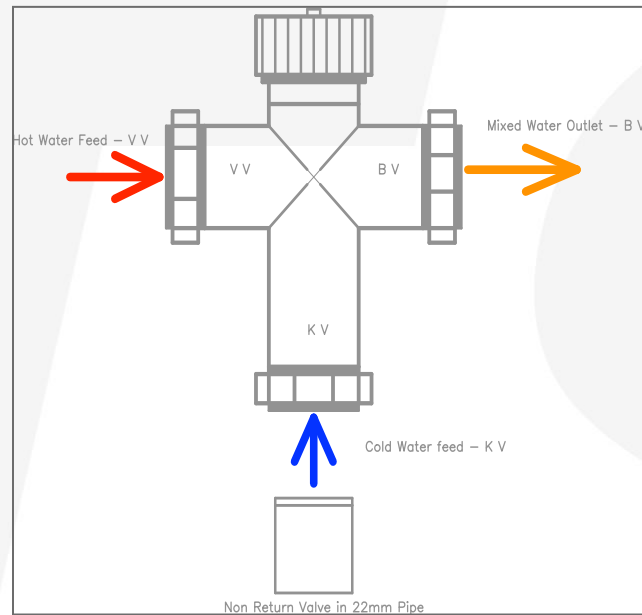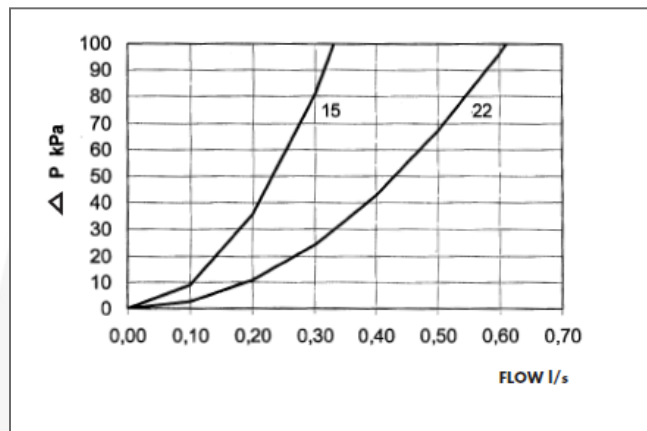

South Africa's leading **solar water heating & heat pump** supplier

Tel: 021 854 5290 | Fax: 086 505 0707 | Email: info@itssolar.co.za | Web: www.itssolar.co.za